




SFD
Sara Ferrari Design

UNICO AIR

The slimmest, with inverter motor and R32 gas

Cod. 02237

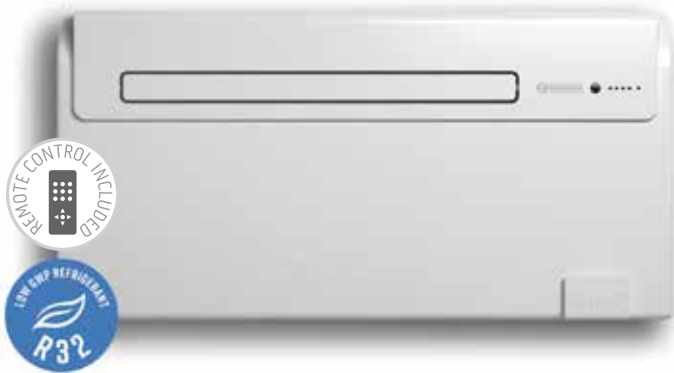

CONDENSATION DRAIN

Mandatory for the HP version.



SLIM DESIGN

All Unico's technology in just 16 cm thickness. Unico Air is the thinnest air conditioner without outdoor unit,



SILENT SYSTEM

Thanks to sound-absorbing and anti-vibration materials, sound pressure drops up to 27 dB (A)*



LOW GWP GAS

Use the R32 refrigerant gas: more efficient and with greenhouse effect reduced to almost 70% (compared to R410A).



INVERTER TECHNOLOGY

The motor speed is constantly adjusted according to the set temperature, to optimise energy consumption.

FEATURES

Max power: 2.4 kW

Available in the HP (Heat Pump) version

Cooling class **A**

R32 refrigerant gas

Large flap for the homogeneous diffusion of the air in the environment

Multi-filtering system consisting of an electrostatic filter (with anti-dust function) and activated carbon filter (effective against unpleasant odours).

Multifunction remote control

FUNCTIONS

Cooling, heating (HP only), dehumidification and ventilation

Economy function: allows energy savings, automatically optimising machine performance

Auto function: modulates the operating parameters in relation to the room temperature.

Sleep function: gradually increases the set temperature and ensures reduced noise for better night-time well-being.



















24 H timer

* Measurement in a semi-anechoic chamber at 2m distance ventilation only.



Air conditioners and air-to-air heat pumps without outdoor unit

NEW

			Unico Next 10 HP PVAN	Unico Air 8 SF	Unico Air 8 HP	Unico Air 10 HP EVA
PRODUCT CODE			02456	01503	01504	02237
EAN CODE			8021183024562	8021183015034	8021183015041	8021183022377
Cooling power (min/max)		kW	1,0 / 2,5	-	-	1,9/2,4
Heating power (min/max)		kW	1,0 / 2,3	-	-	1,8/2,3
Nominal cooling capacity (1)	Prated	kW	 2,1	 1,8	 1,8	 2,2
Nominal heating capacity (1)	Prated	kW	 1,7	-	 1,7	 2,1
Nominal power consumption for cooling (1)	PEER	kW	0,8	0,7	0,7	0,8
Nominal absorption for cooling (1)		A	4,7	3,1	3,1	4,7
Nominal power consumption for heating (1)	PCOP	kW	0,5	-	0,5	0,7
Nominal absorption for heating (1)		A	3,4	-	2,5	3,4
Nominal energy efficiency index (1)	EERd		2,6	2,6	2,6	2,6
Nominal efficiency coefficient (1)	COPd		3,1	-	3,1	3,1
Energy efficiency class in cooling (1)						
Energy efficiency class in heating (1)				-		
Energy consumption in "thermostat off" mode	PTO	W	14	14,0	14,0	33
Energy consumption in "standby" mode (EN 62301)	PSB	W	0,5	0,5	0,5	0,5
Energy consumption for double pipe appliances (1) - cooling function	QDD	kWh/h	0,8	0,7	0,7	0,8
Energy consumption for double pipe appliances (1) - heating function	QDD	kWh/h	0,5	-	0,5	0,7
Cooling power with Silent Mode function		kW	1,4	-	-	-
Heating power with Silent Mode function		kW	1,4	-	-	-
Supply voltage	V-F-Hz		230-1-50	230-1-50	230-1-50	230-1-50
Supply voltage (min/max)	V		198 / 264	198 / 264	198 / 264	198 / 264
Maximum power consumption in cooling mode (1)		kW	0,3 / 1,1	-	-	0,7/1,1
Absorption in cooling mode (min/max)		A	2,5 / 7,2	-	-	3,7/5,3
Absorbed power in heating mode (min/max)		kW	0,3 / 1,0	-	-	0,5/0,8
Maximum absorption in heating mode (min/max)		A	2,1 / 5,9	-	-	2,5/4,6
Maximum power consumption with electric resistance heating		kW	-	-	-	-
Maximum absorption with electric resistance heating		A	-	-	-	-
Dehumidification capacity	l/h		0,7	0,6	0,6	0,8
Air flow rate in cooling environment (max/med/min)	m³/h		380/270/195	215/180/150	215/180/150	235/180/150
Air flow rate in heating environment (max/med/min)	m³/h		380/270/195	-	215/180/150	190/170/150
Air flow rate with electric resistance heating environment	m³/h		-	-	-	-
External air flow rate in cooling (max/min)	m³/h		650/350	380	380	380/190
External air flow rate in heating (max/min)	m³/h		650/350	-	380	380/190
Internal ventilation speed			3	3	3	3
External ventilation speed			6	1	1	2
Diameter wall holes**	mm		162/202	162	162	162
Electric resistance heating			-	-	-	-
Maximum remote control range (distance/angle)	m / °		8 / ±80°	8 / ±80°	8 / ±80°	8 / ±80°
Dimensions (WxHxD) (without packaging)	mm		1015 x 540 x 180	978 x 491 x 164	978 x 491 x 164	978 x 500 x 164
Dimensions (WxHxD) (with packaging)	mm		1100 x 605 x 290	1060 x 595 x 250	1060 x 595 x 250	1060 x 595 x 250
Weight (without packaging)	kg		41	37	37	39
Weight (with packaging)	kg		43	41	41	43
Internal sound pressure (min/max) (2)	dB(A)		 26-40	 27-38	 27-38	 27-38
Silent Mode sound pressure level	dB(A)		30	-	-	-
Degree of protection provided by covers			IP 20	IP 20	IP 20	IP20
Refrigerant gas*	Type		R290	R410A	R410A	R32
Global warming potential	GWP		3	2088	2088	675
Refrigerant gas charge	kg		0,145	0,47	0,47	0,37
Maximum operating pressure	MPa		3,1	4,20	4,20	4,28
Power cable (N° pole x section mm²)			3 x 1,5	3 x 1,5	3 x 1,5	3 x 1,5

LIMITS OF OPERATING CONDITIONS

Indoor ambient temperature	Maximum temperature in cooling	DB 35°C - WB 24°C	DB 35°C - WB 24°C	DB 35°C - WB 24°C
	Minimum temperature in cooling	DB 18°C	DB 18°C	DB 18°C
	Maximum temperature in heating	DB 27°C	DB 27°C	DB 27°C
	Minimum temperature in heating	-	-	-
Outdoor ambient temperature	Maximum temperature in cooling	DB 43°C - WB 32°C	DB 43°C - WB 32°C	DB 43°C - WB 32°C
	Minimum temperature in cooling	-	-	-
	Maximum temperature in heating	DB 24°C - WB 18°C	DB 24°C - WB 18°C	DB 24°C - WB 18°C
	Minimum temperature in heating	DB -15°C	DB -15°C	DB -15°C

(1) Test conditions: the data refer to the EN14511 standard - HEATING MODE: Temperature: outdoor environment DB 7°C / WB 6°C; indoor environment DB 20°C / WB 19°C - COOLING MODE: outdoor ambient temperature DB 35°C / WB 24°C; indoor environment DB 27°C / WB 19°C

(2): Declaration of test data in a semi-anechoic chamber at a distance of 2m, minimum pressure in ventilation only.

* Hermetically sealed equipment containing fluorinated gas with GWP equivalent 2088.

** Machine supplied with 202 mm wall opening grilles. If necessary, to replace an old Unico, the machine can also be installed with holes of 162 mm in diameter.