


UNICO PRO [EVAN]

Heat pump air conditioner without outdoor unit

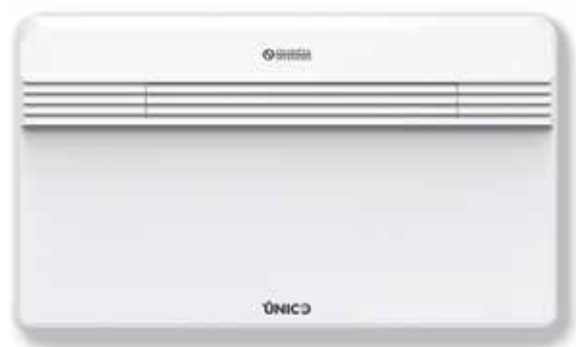

PRO POWER

Super cooling power (up to 3.5 kW) to meet the needs of even the largest environments.



HIGH PERFORMANCE

High efficiency class (up to A+) and state-of-the-art electronics, synchronized with the compressor to achieve the best acoustic comfort, at any operating condition.



AWARD WINNING DESIGN

Designed by Matteo Thun and Antonio Rodriguez, it stands out for its essential and original lines, awarded by numerous international competitions.



CONDENSATE DRAIN
Mandatory, if heating is used.
See the installation manual for details.




FEATURES

- Two models of Max power: 3.4 kW and 3.5 kW
- Available in the version: HP (Heat Pump). In the absence of condensation drainage, it is possible to configure the machine, during installation, in the "ONLY COOLING" version, disabling the heating function. If necessary, it is also possible to configure it in "ONLY HEATING", deactivating the cooling function.
- Class in cooling: up to A+ (on a range between A+++ and D)
- Refrigerant gas: R32
- The internal components are all accessible from the front with the machine already installed
- Large flap for the homogeneous diffusion of air in the environment
- Equipped with a multi-filtering system, consisting of an electrostatic filter (with anti-dust function) and activated carbon filter (effective against unpleasant odours).
- Backlit display with touch controls on the machine
- On/off contact for enable or energy boost.
- There is an RS485 port prepared for controlling the conditioner with external BMS in Modbus RTU language.

FUNCTIONS

- **Cooling, heating, dehumidification and ventilation**
- **Economy function:** allows energy savings, automatically optimising machine performance
- **Auto function:** modulates the operating parameters in relation to the room temperature.
- **Silent Mode function:** mode that sets the machine to the lowest noise level. The compressor and fans are set to reduce the sound pressure down to only 34 dB(A).
- **24 H timer**

DIMENSIONS AND WEIGHT

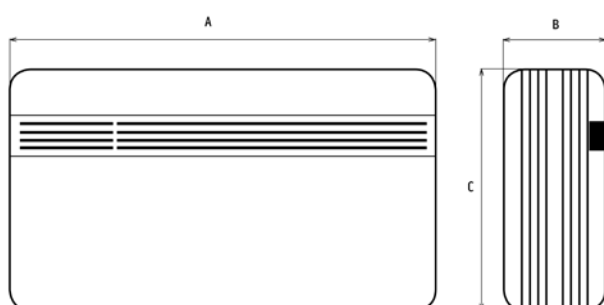

		30/35
A	mm	903
B	mm	215
C	mm	520
Weight	kg	39

TECHNICAL DATA

			Unico Pro 30 HP EVAN	Unico Pro 35 HP EVAN
PRODUCT CODE			02238	02239
EAN CODE			8021183022384	8021183022391
Cooling power (min/max)		kW	1,9/3,4	1,9 / 3,5
Heating power (min/max)		kW	1,5/3,0	1,5 / 3,2
Nominal cooling capacity (1)	Prated	kW	2,6	3,1
Nominal heating capacity (1)	Prated	kW	1,8	2,4
Nominal power consumption for cooling (1)	PEER	kW	0,8	1,2
Nominal absorption for cooling (1)		A	4,0	4,3
Nominal power consumption for heating (1)	PCOP	kW	0,5	0,8
Nominal absorption for heating (1)		A	3,6	3,76
Nominal energy efficiency index (1)	EERd		3,1	2,6
Nominal efficiency coefficient (1)	COPd		3,4	3,1
Energy efficiency class in cooling (1)			A+	A
Energy efficiency class in heating (1)			A	A
Energy consumption in "thermostat off" mode	PTO	W	22	22
Energy consumption in "standby" mode (EN 62301)	PSB	W	0,5	0,5
Energy consumption for double pipe appliances (1) cooling function	QDD	kWh/h	0,8	0,8
Energy consumption for double pipe appliances (1) heating function	QDD	kWh/h	0,5	0,7
Cooling power with Silent Mode function		kW	1,9	1,9
Heating power with Silent Mode function		kW	1,5	1,5
Supply voltage		V-F-Hz	230-1-50	230-1-50
Supply voltage (min/max)		V	198 / 264	198 / 264
Power consumption in cooling mode (min/max)		kW	0,5/1,5	0,5 / 1,5
Absorption in cooling mode (min/max)		A	3,1/7,5	3,1 / 7,5
Absorbed power in heating mode (min/max)		kW	0,4/1,4	0,4 / 1,4
Absorption in heating mode (min/max)		A	2,5/6,8	2,5 / 6,8
Maximum power consumption with electric resistance heating		kW	-	-
Maximum absorption with electric resistance heating		A	-	-
Dehumidification capacity		l/h	1,3	1,3
Air flow rate in cooling environment (max/med/min)		m³/h	350 / 390 / 490	350 / 390 / 490
Air flow rate in heating environment (max/med/min)		m³/h	350 / 390 / 490	350 / 390 / 490
Air flow rate with electric resistance heating environment		m³/h	-	-
External air flow rate in cooling (max/min)		m³/h	120/600	120/600
External air flow rate in heating (max/min)		m³/h	120/600	120/600
Internal ventilation speed			3	3
External ventilation speed			6	6
Diameter wall holes**		mm	162 / 202	162 / 202
Electric resistance heating			-	-
Maximum remote control range (distance/angle)		m / °	8 / ±80°	8 / ±80°
Dimensions (WxHxD) (without packaging)		mm	903 x 520 x 215	903 x 520 x 215
Dimensions (WxHxD) (with packaging)		mm	980 x 610 x 330	980 x 610 x 330
Weight (without packaging)		kg	39	39
Weight (with packaging)		kg	42	42
Internal sound pressure (min/max) (2)		dB(A)	32-41	32-43
Silent Mode sound pressure level		dB(A)	34	34
Degree of protection provided by covers			IP 20	IP 20
Refrigerant gas*		Type	R32	R32
Refrigerant gas charge		kg	0,46	0,46
Global warming potential	GWP		675	675
Maximum operating pressure		MPa	4,28	4,28
Power cable (N° pole x section mmq)			3 x 1,5	3 x 1,5

LIMITS OF OPERATING CONDITIONS

Indoor ambient temperature	Maximum temperature in cooling	DB 35°C - WB 24°C
	Minimum temperature in cooling	DB 18°C
	Maximum temperature in heating	DB 27°C
	Minimum temperature in heating	-
Outdoor ambient temperature	Maximum temperature in cooling	DB 43°C - WB 32°C
	Minimum temperature in cooling	-
	Maximum temperature in heating	DB 24°C - WB 18°C
	Minimum temperature in heating	DB -15°C

(1) Test conditions: the data refer to the EN14511 standard - HEATING MODE: Temperature: outdoor environment DB 7°C / WB 6°C; indoor environment DB 20°C / WB 15°C - COOLING MODE: outdoor ambient temperature DB 35°C / WB 24°C; indoor environment DB 27°C / WB 19°C

(2): Declaration of test data in a semi-anechoic chamber at a distance of 2m, minimum pressure in ventilation only.

* Hermetically sealed equipment containing fluorinated gas with GWP equivalent 675.

** Machine supplied with 202 mm wall opening grilles. If necessary, to replace an old Unico, the machine can also be installed with holes of 162 mm in diameter. Energy efficiency classes refer to a range between A+++ and D.